




Wall Lights | 220-240 V | 1xR7s
1131



Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Power	1 x 120 W
Lamp cap	1 x R7s
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.175 Kg

Finishing diffuser	
Material	Glass
Colour	white
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Processing	Coating

Wall Lights | 220-240 V | 1xR7s | Base 1131

Double emission wall lights for indoor application. Halogen lamp included 120W, lamp cap 1xR7s.

The diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.175 kg.


The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	50 %
Source lumens	2250 lm
Delivered lumens	1140 lm
Consumption	120 W
Luminaire efficacy	18 lm/W
Colour temperature	2900 K
Colour rendering index	100 Ra

UGR	
UGR axial	15.8
UGR transversal	13.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	96°

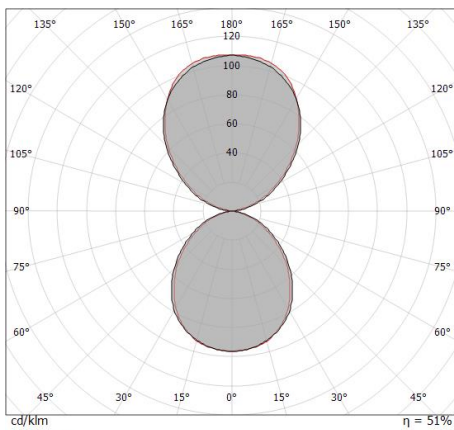

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.18 1.11	E(0°) 868 E(C90) 117 E(C0) 129
1.0	2.36 2.23	E(0°) 217 E(C90) 29 E(C0) 32
1.5	3.54 3.34	E(0°) 96 E(C90) 13 E(C0) 14
2.0	4.72 4.46	E(0°) 54 E(C90) 7 E(C0) 8
2.5	5.90 5.57	E(0°) 35 E(C90) 5 E(C0) 5
3.0	7.07 6.69	E(0°) 24 E(C90) 3 E(C0) 4

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 96.2°)
— C90/C270 (Half-peak divergence: 99.4°)