

Mounting: ceiling
Environment: indoor
Typical use: residentials, hotels, restaurants, common areas, large spaces, meeting rooms, museums, offices, schools, shops

OPTIC

Lighting effects: diffused down with E2 opal
Light output: down 3'230lm (OF)(DM)(TF)
CCT: 3'000K (2'700K on request)
Light source: Led SMD C.R.I.>90
Nominal lifetime: 50'000h L80B20 (Ta 25°C)

ELECTRICAL DATA

Wattage: down 45W (OF)(DM)(TF)
Voltage: 220VAC
Power supply: on/off included inside the lamp

DIMENSIONS & WEIGHT


Dimensions: Ø58cm sectionH5,3x3,5cm
Ambient temperature range: -10 / +35°C
Materials: body: extruded aluminum
cover: pmma OPAL
Weight: 4kg



Bellai Home Ceiling Ø 58cm
designed by TI Lighting LAB

Ceiling lamp diameter 58cm in painted aluminum with ring shape.
DOWNLIGHT emission.


BV White

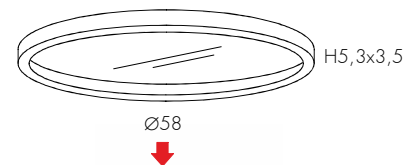

CERTIFICATIONS



LIGHT EMISSION

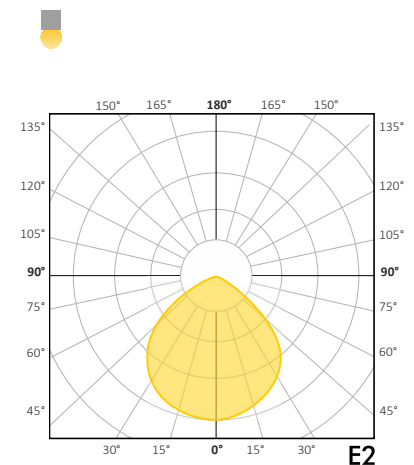

3027EOF

OPTIONS

DIMMABLE DALI (Push)

Code:  3027EDM

PHASE CUT

Code: 3027ETF

BLUETOOTH

Codice: 3027EBT

STRUCTURE FINISHES


-  NE black
-  TO dove grey
-  RU rust
-  GV grey
-  SO brushed aluminum



Bellai Home Ceiling Ø 58cm
designed by TI Lighting LAB

Ceiling lamp diameter 58cm in painted aluminum with ring shape.
DOWNLIGHT emission.

 BV White

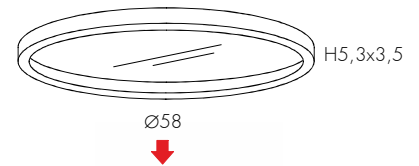

CERTIFICATIONS



LIGHT EMISSION

