



06 Downlights Fixed LED>The IP54 Bathroom Downlights

10113B/W/W



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

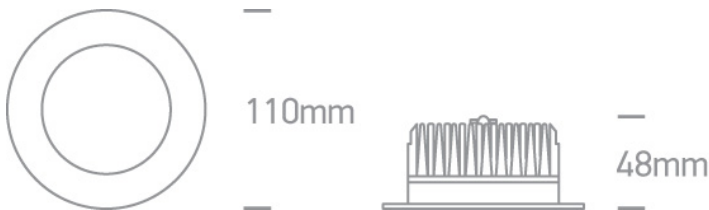

Gallery



Physical Specification



Item Group	06 Downlights Fixed LED
Family	The IP54 Bathroom Downlights
Order Code	10113B/W/W
Colour	White
Material	Die Cast
Diffuser Material	Plastic
Shape	Circular

Height
Diameter
Cutout Hole Diameter
Recessed Ceiling
Depth Required
Indoor
Outdoor
Adjustable


48mm
110mm
95mm
Yes
70mm
Yes
Yes
No

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark


External-Included
100-240V
Yes
Yes

13W
IP54
LED built in
No


Fitting
Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source

Constant Current
380mA
29V

11W
IP54
LED built in

LED Type	SMD 2835
LED Brand	Epistar
LED Number	27
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,75-15,2W
Power Factor	0,9
Constant Current	Yes
Output	380mA
Voltage Range	23-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
Brand	0
Protection	Short Circuit and Overload

Illumination Data


Colour Temperature	3000K
Lumen Output	925lm
Light Efficiency	71,15lm/W
CRI	80
Beam Angle	90°



Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0,316Kg
Pcs/Carton	24
Barcode	5291889043201
HS Code	9405409900

Energy Label

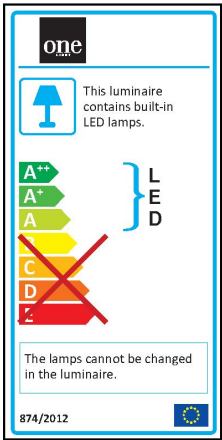

Certification & Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to
one light!

